

## 2034\_Schaltnetzteil GLG-200-24 24V 200W 8,33A IP67



### ■ Features:

- CV + CC mode power supply
- Built-in active PFC function
- Universal AC input / Full range
- Protections: Short circuit / Over current / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- IP67 design

 **CE IP67**

### ELECTRICAL SPECIFICATION

MODEL	GLG-200-12	GLG-200-24
<b>OUTPUT</b>		
<b>RATED VOLTAGE</b>	12V	24V
<b>RATED CURRENT</b>	16.6A	8.33A
<b>RATED POWER</b>	199.2W	199.92W
<b>RIPPLE &amp; NOISE (max.) [3]</b>	360mV <sub>p-p</sub>	720mV <sub>p-p</sub>
<b>TOLERANCE [4]</b>	±3%	
<b>LINE REGULATION</b>	±1%	
<b>LOAD REGULATION</b>	±2%	
<b>SETUP, RISE TIME [5]</b>	1000ms, 80ms / 230VAC; 1000ms, 80ms / 115VAC	
<b>HOLD UP TIME (typ.)</b>	30ms / 115VAC, 60ms / 230VAC	
<b>INPUT</b>		
<b>VOLTAGE RANGE</b>	90 ÷ 264VAC	
<b>FREQUENCY RANGE</b>	47 ÷ 63Hz	
<b>EFFICIENCY (typ.)</b>	87%	87%
<b>AC CURRENT (typ.)</b>	2.2A/115VAC, 1.1A / 230VAC	
<b>POWER FACTOR</b>	PF > 0.95 / 230VAC; PF > 0.98 / 115VAC at full load	
<b>INRUSH CURRENT (typ.)</b>	65A / 230VAC	
<b>LEAKAGE CURRENT(max.)</b>	1mA / 240VAC	
<b>PROTECTIONS</b>		
<b>SHORT-CIRCUIT</b>	Type: hiccup mode, auto-recovery.	
<b>OVER CURRENT</b>	Range: 95 ÷ 120% rated current	
	Type: constant current limiting, auto-recovery.	
<b>OVER VOLTAGE</b>	14.4 ÷ 18V	29 ÷ 36V
	Type: shut down output voltage. Re-power on to recovery.	

## 2034\_Schaltnetzteil GLG-200-24 24V 200W 8,33A IP67

### WORKING ENVIRONMENT

<b>WORKING TEMPERATURE</b>	-30°C ÷ 70°C (Refer to Derating Curve)
<b>WORKING HUMIDITY</b>	20 ÷ 95% RH non-condensing
<b>STORAGE TEMPERATURE AND HUMIDITY</b>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
<b>TEMPERATURE COEFFICIENT</b>	± 0.03% / °C (0°C ÷ 50°C)
<b>VIBRATION</b>	10 ÷ 500Hz, 5G, 10min / cycle, period for 60min. each along X, Y, Z axes

### SAFETY AND EMC REGULATIONS


<b>SAFETY STANDARDS</b>	Compliance to EN61347-1, EN61347-2-13, IP65
<b>WITHSTAND VOLTAGE</b>	I-P/O-P: 3kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
<b>ISOLATION RESISTANCE</b>	I-P/O-P, I-P/GND, O-P/GND: 100MΩ/500VDC/25°C/70%
<b>EMC EMISSION</b>	Compliance to EN55015
<b>EMC IMMUNITY</b>	Compliance to EN61547; EN55024; EN61000-4-2, -3, -4, -5, -6, -8, -11
<b>HARMONIC CURRENT</b>	Compliance to EN61000-3-3; EN61000-3-2 class C (≥ 90% load)

### OTHERS


<b>DIMENSIONS</b>	242 x 96 x 50mm
<b>WEIGHT AND PACKING</b>	1.8kg; 10pcs./box; box weight and dimensions: 18kg; 30 x 29 x 24.5cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Constant current operation region is within announced range. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.
3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
4. Tolerance includes set up tolerance, line regulation and load regulation.
5. Setup and rise time is measured from 0 to 90% rated output voltage.
6. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

### MECHANICAL SPECIFICATION

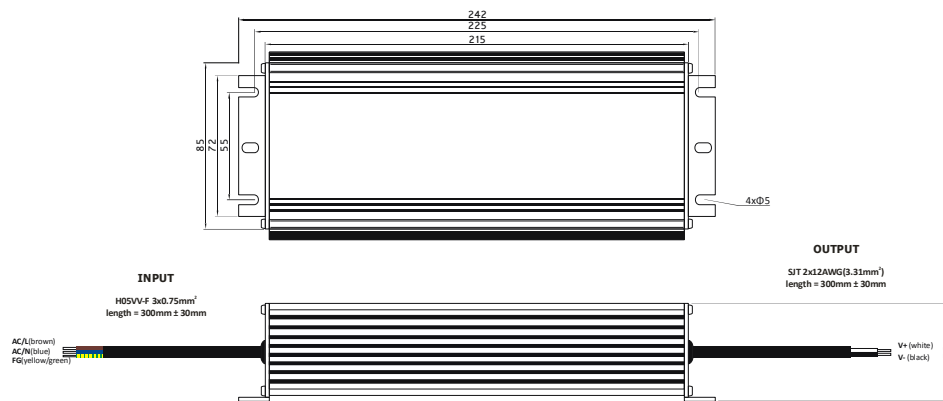

### DERATING CURVE

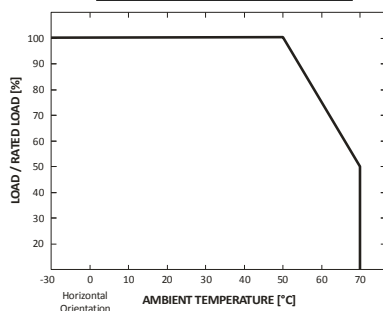

### STATIC CHARACTERISTIC

